


WX VAPOR 2.5

CHANGEABLE

MIL-PRF-32432A STANAG 2920/4296 ANSI Z.87 EN166F

The WX VAPOR infuses its lightweight frame with an aggressive design, an outstanding field of view, and thin rubber-tipped temples to give a unique, bold look, packed with versatility. The flexible frame guarantees a fit on all head shapes, and the rubberized Twist Lock nose piece ensures a superior grip during almost any

activity. Available in both two- and three-lens kits, you have the power to change the lenses as needed for your lighting conditions and environment. Designed with style and comfort in mind, the WX VAPOR is here to keep you safe from unexpected impacts.

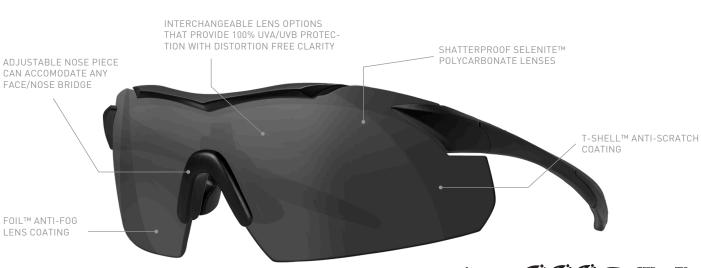

STANDARD LENSES *LIGHT TRANSMISSION VARIES +/- 3% DEPENDING ON MODEL					
	GREY	SELENITE™ POLYCARBONATE	WEIGHT: 17 GRAM	LT: 15%*	COATING: HARD COATING, ANTI FOG
	POLARIZED GREY	SELENITE™ POLYCARBONATE	WEIGHT: 18 GRAM	LT: 15%*	COATING: HARD COATING, ANTI REFLECTIVE, OLEOPHOBIC
\bigcirc	CLEAR	SELENITE™ POLYCARBONATE	WEIGHT: 17 GRAM	LT: 89%*	COATING: HARD COATING, ANTI FOG
	LIGHT RUST	SELENITE™ POLYCARBONATE	WEIGHT: 17 GRAM	LT: 52%*	COATING: HARD COATING, ANTI FOG
	YELLOW	SELENITE™ POLYCARBONATE	WEIGHT: 17 GRAM	LT: 82%*	COATING: HARD COATING, ANTI FOG
FRAMES					HEAD SIZE: SMALL TO 2-XLARGE // FRAME SIZE: 44 / 24 / 135
A	MATTE BLACK	TEMPLES: STANDARD	TRILOID™ NYLON	WEIGHT: 18 GR	АМ
	MATTE TAN	TEMPLES: STANDARD	TRILOID™ NYLON	WEIGHT: 18 GR	АМ

ON REQUEST, AVAILABLE IN TREE DIFFERENT FRAME AND LENS SIZES SMALL, MEDIUM OR LARGE





LASER EYE PROTECTION LENSES							
	RED TINT	SELENITE™ POLYCARBONATE	OD 2+ AT 405 NM OD 5+ AT 532 NM	IVPT: 38% IVST: 27%	LT: 49%	WEIGHT: 18 GRAM	COATING: HARD COATING, ANTI FOG
	BLUE TINT	SELENITE™ POLYCARBONATE	OD 2+ AT 405 NM OD 2+ AT 635 NM OD 3+ AT 640 NM OD 4+ AT 650 NM OD 3+ AT 660 NM	IVPT: 47% IVST: 75%	LT: 36%	WEIGHT: 18 GRAM	COATING: HARD COATING, ANTI FOG
-	GREEN TINT	SELENITE™ POLYCARBONATE	OD 3+ AT 405 NM OD 1+ AT 450 NM OD 2+ AT 785 NM OD 6+ AT 808 NM OD 7+ AT 820 NM OD 6+ AT 830 NM OD 6+ AT 1064 NM	IVPT: 38% IVST: 26%	LT: 39%	WEIGHT: 18 GRAM	COATING: HARD COATING, ANTI FOG
$\overline{\mathcal{O}}$	LIGHT GREY TINT	SELENITE™ POLYCARBONATE	OD 6+ AT 1064 NM	IVPT: 55% IVST: 53%	LT: 55%	WEIGHT: 18 GRAM	COATING: HARD COATING, ANTI FOG

PACKAGE	S			THIS MODEL IS APEL APPROVED
3501	FRAME: MATTE BLACK	LENSES: GREY + CLEAR	NSN 4240-01-630-7493	
3502	FRAME: MATTE BLACK	LENSES: GREY + CLEAR + LIGHT RUST	NSN 4240-22-629-0758	
3511	FRAME: MATTE TAN	LENSES: GREY + CLEAR	NSN 4240-22-637-5852	
3512	FRAME: MATTE TAN	LENSES: GREY + CLEAR + LIGHT RUST	NSN 4240-22-629-0759	

PRESCRIPTION CARRIER

SOLD SEPARATELY

TWIST LOCK ADJUSTABLE NOSEPIECE

PUSH CLOSEF

Designed to provide an universal fit and slip-free comfort.

Insert a prescription carrier into the eyewear for corrected vision behind high impact protection.





WEIGHT (WITHOUT PRESCRIPTION LENSES): 2 GRAM

IMPACT PERFORMANCE

Founded on supplying military forces and law enforcement personnel with top-of-the-line ballistic eyewear, Wiley X continues to hold safety as our priority, making sure to meet international expectations and accredited test standards. This model passes the following tests:

MIL-PRF-32432A(GL) SPECTACLE STANDARD		VELOCITY	768-796 KM/H
ANSI SPECTACLE STANDARD	165 KM/H		
EN.166F SPECTACLE STANDARD	● 162 KM/H		

INCLUDED ACCESSORIES

TS-235M	SEMI HARD CASE WITH MOLLE STRAP
A427	CLEANING CLOTH
A492	LEASH CORD WITH RUBBER TIPS

WILEY X EMEA LLC / SØNDERGADE 8-10 / 7570 VEMB, DENMARK / + 45 96 93 00 45 / INFO@WILEYX.EU / WILEYX.EU